

- >> Compatible for clean waters, sumps and general applications
- >> Accurate and repeatable switching
- >> Adjustable Max and Min switching levels with the counter-weight
- >> Protection class IP68



## Liquid level switch


FX-LVSW-x switches are ideal for high volume use in clean water and sump tanks. They provide accurate and repeatable switching and by regulating the distance of the adjustable counter-weight, the maximum and minimum levels can be regulated.

The float (Polypropelene) contains a micro switch assembly and is suspended with a cable. When the float tilts upwards/downwards due to a rise/decrease in fluid level it operates the micro switch.

FX-LVSW standard cable length is 5 meters. Please contact [info@fidelixme.com](mailto:info@fidelixme.com) for longer cable lengths.

### **Technical features**

Switch capacity: 250V, 10A  
Operating temperature: -10 - 60°C  
Min specific gravity of liquid: 0.9  
Protection Class: IP68  
Float Dimensions: 80 x 142 x 42 mm  
Float material: PP  
Cable length: PVC, 3core, 5 meters (see order code)  
Manufacturing Process: ISO9001

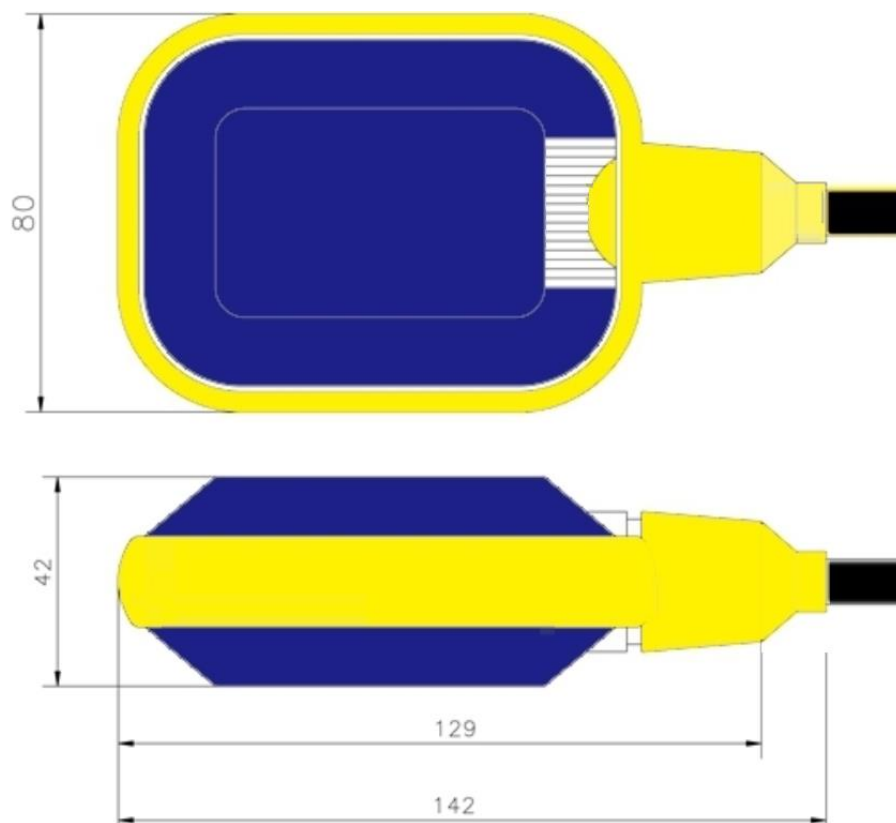

## Part number

**FX-LVSW-5**

5 meter cable length